

Engine output: **13.1 PS / 9.6 kW**

Machine weight (Cabin / Canopy): **1,540 / 1,490 kg**

For Earth, For Life
Kubota

KX016-4

KUBOTA MINI EXCAVATOR



SUPERIOR PERFORMANCE

Kubota's new KX016-4 mini excavator raises the standard in the 1.5-2.0 tonne category with a powerful digging force and a wider working range that rival higher-end excavators. And with enhanced accessibility to sites such as roadsides or residential areas, the KX016-4 gets the jobs done easier from large construction areas to the tightest of places.



SUPERIOR PERFORMANCE



Enhanced digging force

The KX016-4 delivers an impressive bucket digging force. Its powerful and well-balanced arm and bucket allow the operator to dig faster and more efficiently even in the toughest conditions.

Kubota original engine

The KX016-4 is powered by Kubota's impressive D782 13.1 PS engine. Engineered with the power to maximise digging and lifting performance, it also delivers minimised noise and vibration, meeting the engine emission regulations.



Variable track gauge

To optimise stability when using heavy attachments, the KX016-4 tracks can be expanded to a maximum of 1,240 mm and retracted to 990 mm to make passing through narrow doorways and tight work possible. Either adjustment can be made in just seconds by operating the independent track gauge lever.



DELUXE INTERIOR

Offering one of the largest cabins in its class with ample legroom, adjustable seating and a wide door, the KX016-4 brings more comfort to tough work. Combined with the handy new multifunctional digital panel, operations are now easier than ever.



DELUXE INTERIOR



Spacious cabin

To minimise fatigue, our new larger cabin delivers more comfort over our previous model. It provides more legroom with a flat floor plus an adjustable suspension seat.

Easy cabin entry and exit

Increasing the cabin door width by 30% at the narrowest point allows quick access to and from the cabin making operations that require frequent exiting, such as trenching and piping, much easier.



New digital panel

Following the excellence of Kubota's Intelligent Control System, the new digital panel puts convenience at the operator's fingertips. The user-friendly digital panel is positioned to the front right corner of the operator for better visibility, and features one-touch button operation to view the time, hour meter and tachometer. Warning lamps with code numbers on the display will alert you in case of emergencies such as overheating, hydraulic problems or low battery. Programming of the anti-theft keys can also be easily performed with the digital panel.

With easier access, simpler settings, easy-to-read indicators and alerts, you'll always be aware of the excavator's functioning status.



SAFETY / DURABILITY EASY MAINTENANCE


The KX016-4 offers added peace-of-mind with extremely high levels of safety and durability. Furthermore, Kubota simplifies inspections and repairs with easier accessibility to the major components.



Easy maintenance

Kubota has made routine maintenance extremely simple by consolidating primary engine components onto one side for easier access. Engine and other vital components can be inspected quickly and easily.

- A. Air cleaner**
- B. Water separator**
- C. Fuel filter**
- D. Alternator**
- E. Starter motor**

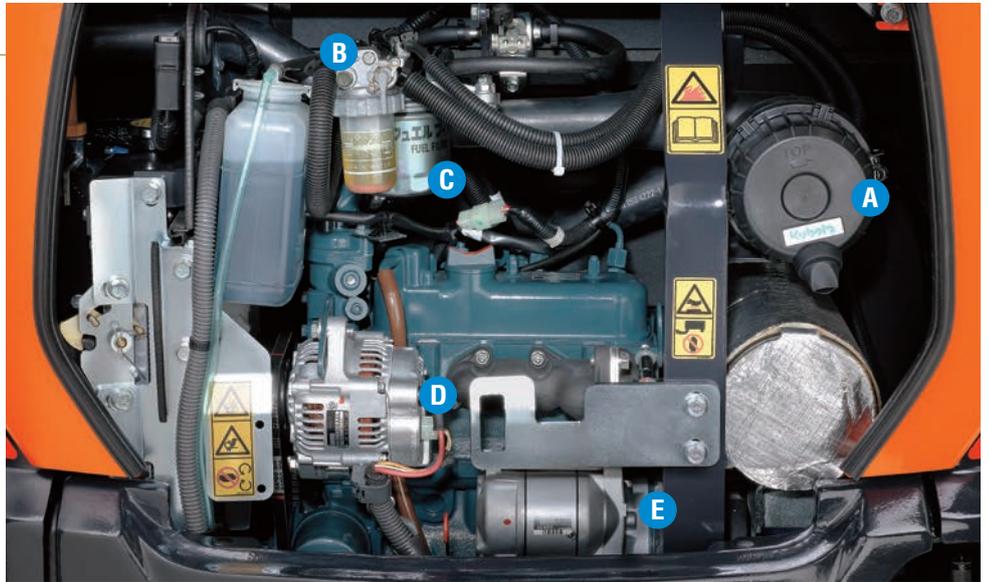

Topside boom cylinder

For increased reliability when performing in hazardous conditions, including demolition jobs when a breaker is fitted, the boom cylinder has been positioned on the topside of the boom to prevent cylinder damage.



Integrated travel motor hoses

Kubota has enclosed the travel motor hoses within the track frame for added protection.



Standard Equipment

Engine/Fuel system

- Double-element air cleaner
- Fuel refueling buzzer
- Extended fuel filler

Undercarriage

- 230 mm rubber track
- 2-speed travel
- Variable track

Hydraulic system

- Pressure accumulator
- Hydraulic pressure checking ports
- Third line hydraulic direct return for AUX
- Variable displacement pump
- Straight travel circuit

Safety system

- Engine start safety system on the left console
- Travel lock system
- Swivel lock system
- Kubota original anti-theft system
- Battery isolator



Working equipment

- 950 mm arm
- Auxiliary hydraulic circuit piping to the arm's end
- 1 working light on the boom

Cabin

- ROPS (Roll-over Protective Structure, ISO3471)
- TOPS (Tip-Over Protective Structure)
- OPG (Operator Protective Guard, Level 1)
- Weight-adjustable semi suspension seat
- Seatbelt
- Hydraulic pilot control levers with wrist rests
- Cabin heater for defrosting and demisting with air ventilation
- Emergency exit hammer
- Front window power-assisted with gas damper
- 12V power outlet
- Location for radio
- Switch and harness for beacon light
- Digital panel with diagnosis function
- Front guard fixing point
- Side mirror

Canopy

- ROPS (Roll-over Protective Structure, ISO3471)
- TOPS (Tip-Over Protective Structure)
- OPG (Operator Protective Guard, Level 1)
- Weight-adjustable semi suspension seat
- Seatbelt
- Hydraulic pilot control levers with wrist rests
- 12V power outlet
- Switch and harness for beacon light
- Digital panel with diagnosis function
- Front guard fixing point

Optional Equipment

- Radio installation kit on the cabin (Radio bracket, antenna, 2 speakers)
- 2 working lights on the cabin/canopy
- Travel pedal
- Front guard on the cabin/canopy

Kubota Genuine and Approved Parts

for maximum performance, durability and safety



SPECIFICATIONS

Model		KX016-4		
Machine weight ¹ (cabin / canopy)		kg 1540 / 1490		
Operating weight ² (cabin / canopy)		kg 1615 / 1565		
Bucket capacity, std. SAE/CECE		m ³ 0.035 / 0.03		
Engine	Model		D782-E3-BH	
	Type		Water-cooled, diesel engine, E-TVCS	
	Output ISO14396 ³	PS (kW) / rpm	13.3 (9.8) / 2300	
	Output ISO9249 NET ³	PS (kW) / rpm	13.1 (9.6) / 2300	
	Number of cylinders		3	
	Bore × Stroke	mm	67 × 73.6	
	Displacement		cm ³ 778	
	Fuel ⁴		Diesel fuel conforming to EN 590 / HVO conforming to EN 15940	
Dimensions	Overall width	mm	990 / 1240	
	Overall height (cabin / canopy)	mm	2350 / 2330	
	Overall length	mm	3710	
	Ground clearance	mm	160	
	Dozer size (width × height)	mm	990 / 1240 × 230	
	Rubber shoe width	mm	230	
	Minimum front swivel radius	mm	1490	
	Boom swing angle (left / right)	deg	75 / 60	
Hydraulic System	P1, P2		Variable displacement pump	
	Flow rate	ℓ/min	16.6 × 2	
	Hydraulic pressure	MPa (kgf/cm ²)	20.6 (210)	
	P3		Gear pump	
	Flow rate	ℓ/min	10.4	
	Hydraulic pressure	MPa (kgf/cm ²)	20.1 (205)	
	Auxiliary (AUX)	Max. flow rate	ℓ/min	27.0
		Max. hydr. pressure	MPa (kgf/cm ²)	20.6 (210)
	Max. digging force	Arm	kN (kgf)	7.3 (740)
		Bucket	kN (kgf)	12.7 (1300)
Hydraulic reservoir (full)		ℓ	28	
Max. travelling speed (low / high)		km/h	2.1 / 3.8	
Ground contact pressure (cabin / canopy)		kPa (kgf/cm ²)	26.5 (0.27) / 25.5 (0.26)	
Swivelling speed		rpm	9.1	
Fuel tank capacity		ℓ	21.0	
Noise level	LpA	dB (A)	78	
	LwA (2000/14/EC)	dB (A)	93	
Vibration ⁵	Hand arm system (ISO 5349-2:2001)	Digging	m/s ² RMS	<2.5
		Levelling	m/s ² RMS	<2.5
		Driving	m/s ² RMS	<2.5
		Idling	m/s ² RMS	<2.5
	Whole body (ISO 2631-1:1997)	Digging	m/s ² RMS	<0.5
		Levelling	m/s ² RMS	<0.5
		Driving	m/s ² RMS	<0.5
		Idling	m/s ² RMS	<0.5

¹ With 32.5 kg Kubota original bucket, full tanks, rubber shoe.

² Machine weight with 75 kg operator.

³ With diesel fuel conforming to EN590.

⁴ Note that HVO has lower density than diesel fuels.

⁵ These values are measured under specific conditions at maximum engine speed and can deviate, depending on the operating status.

LIFTING CAPACITY

Cabin, rubber version

Lift Point Height	Lifting point radius (2.5m)			Lifting point radius (Max)		
	Over-front		Over-side	Over-front		Over-side
	Blade Down	Blade Up		Blade Down	Blade Up	
2.0m	2.5 (0.25)	2.7 (0.28)	2.3 (0.23)	-	-	-
1.5m	2.7 (0.28)	2.6 (0.27)	2.3 (0.23)	-	-	-
1.0m	3.2 (0.33)	2.5 (0.26)	2.1 (0.21)	2.5 (0.26)	1.9 (0.19)	1.6 (0.16)
0m	3.5 (0.36)	2.4 (0.24)	2.1 (0.21)	-	-	1.6 (0.16)



*The lifting capacities are based on ISO 10567 and do not exceed 75% of the static tilt load of the machine or 80% of the hydraulic lifting capacities of the machine.

*The excavator bucket, hook, sling and other lifting accessories are not included on this table.


* All images shown are for brochure purposes only.

When operating the excavator, wear clothing and equipment in accordance to local legal and safety regulations.

WORKING RANGE

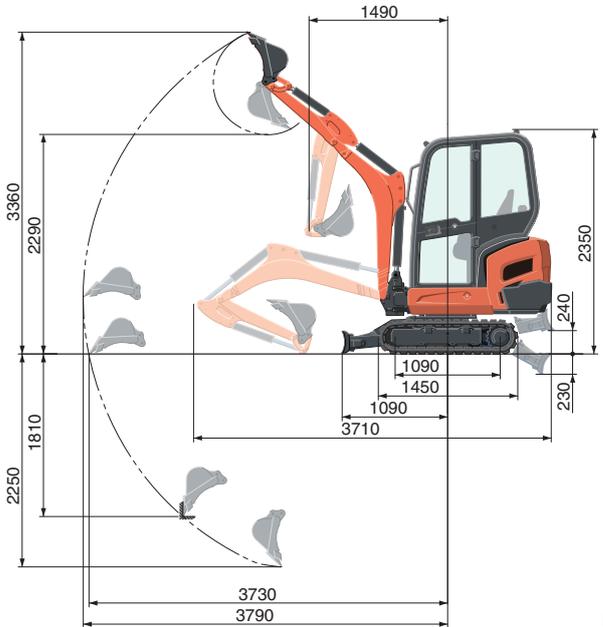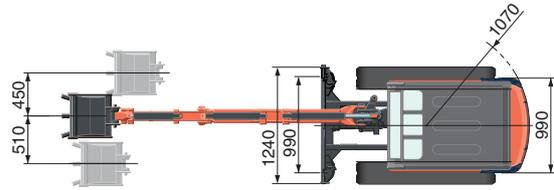

Unit: mm

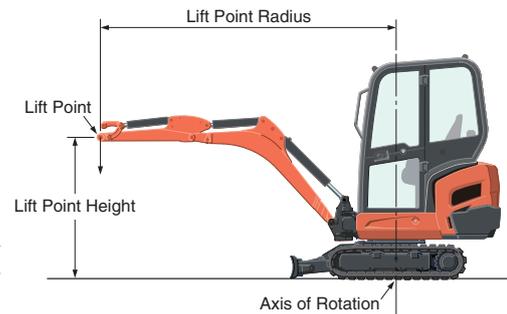

* Working ranges are with Kubota original bucket, without quick coupler.

* Specifications are subject to change without notice for purpose of improvement.

KUBOTA EUROPE S.A.S.

19 rue Jules Vercurysse
 Zone Industrielle - CS 50088
 95101 Argenteuil Cedex France
 Téléphone : (33) 01 34 26 34 34
 Télécopieur : (33) 01 34 26 34 99
<http://www.kubota-eu.com>

