


### KUBOTA F Series


F-251E - F-251 - F391



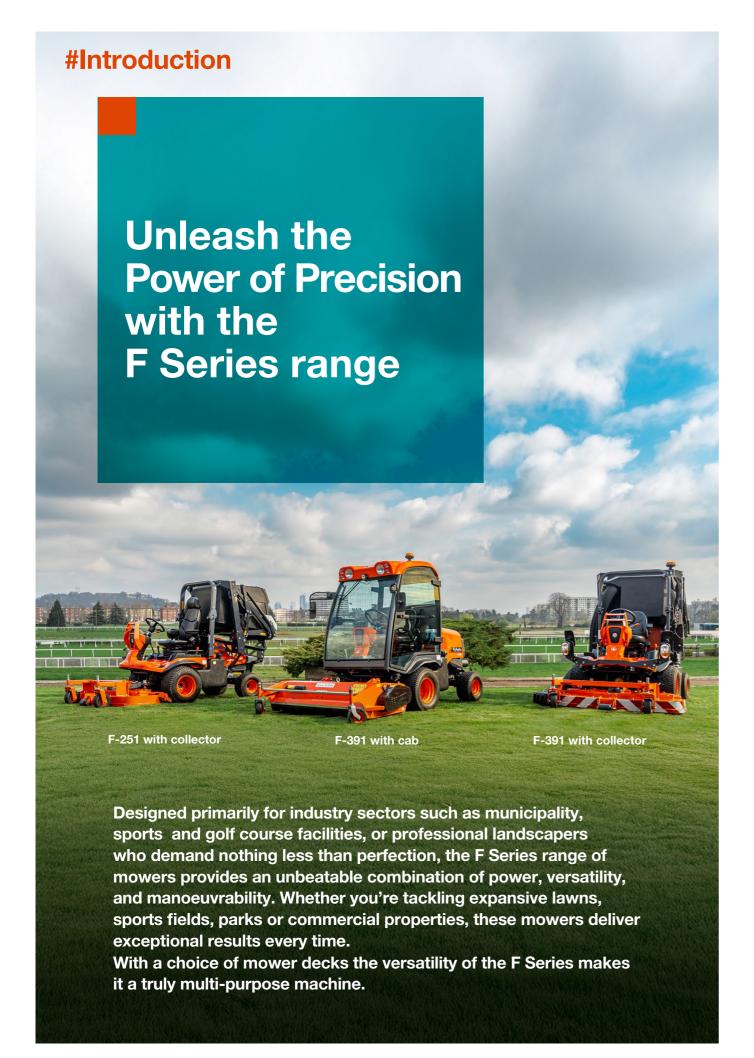

### #Highlights

# ROPS or cab protection. However hard your machine works, operate in comfort and safety

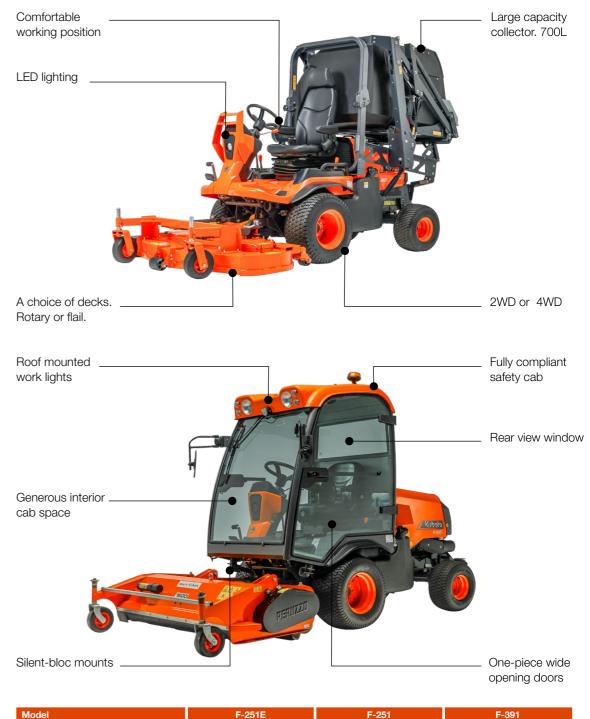





#### **Efficient Fuel Economy**

Powered by KUBOTA D1105 or V1505 engines ensure that you get more out of every tank, reducing fuel consumption and downtime. Reliability and durability are synonymous with Kubota engines.



#### **Enhanced Visibility and Manoeuvrability**

With the deck positioned at the front of the mower, operators can see exactly where they are cutting, making it much easier to navigate around obstacles like trees, flowerbeds, or fences.

**More Precision:** The design allows for a more precise cut, especially around the edges, which means operators don't have to go back and trim those areas later.



#### **Superior Cutting Performance**

Backed up by the KUBOTA engine and advanced cutting technology, our mower decks ensure a clean, even cut every time. Whether it's thick grass, uneven terrain, or wet conditions, it handles all with ease.



#### **Ergonomic Controls & Comfort**

Designed with comfort in mind, the F Series features suspension seating, intuitive controls, and a smooth ride. Spend more time mowing and less time adjusting your equipment. The ergonomic design ensures you stay comfortable during even the longest mowing sessions.

#### #Comfort

# **Exceptional cutting**performance and collection

#### Uniform cut every time.

The mounting and positioning of the mower deck means it's designed to follow the contour of the ground, and the grass is not flattened prior to cutting.

A fully independent PTO drive system ensures minimal power loss and a consistent operating speed whatever the conditions.



#### Side or rear discharge.

The decks available have cutting widths of 60" or 72" and come with either side or rear discharge. The triple blade design ensures a precise fine cut finish.

All decks offer the option of a mulching kit.



#### Flail mower option.

Two mowers with cutting widths of 1400mm (56") or 1600mm (64") come with front castor wheels on bearing rotation and side skid protection from uneven ground and stones.

Excellent performance when tackling all conditions and a choice of blades available to suit the operation.



#### Complete control

The deck lift arms are controlled from a hydraulic lever to the right-hand side of the operator. When lowering, the deck returns to the required cutting height every time

A speed of drop control provides the operator with full control when lowering the mower.

For complete peace of mind, the mower can be locked in position during transportation between sites.

# Operate in complete comfort



#### Comfort and simplicity can be combined

A high-back suspension seat with incorporated headrest and armrests sets the tone for enhanced comfort. A generous floor area with non-slip mats and single pedal HST control adds to the ease of operation.

All the major operating controls are located on the RH side.



#### **Comprehensive instrumentation**

The instrument panel keeps the operator fully informed of the speed settings and operational functions.

The tilting steering wheel allows for a comfortable driving position, whilst ensuring the panel is not visually obstructed.



#### Auto-Assist 4WD

All-Purpose Use: Whatever the task or terrain, F Series can handle a wide range of challenges. The clever auto-assist 4WD system ensures traction drive under all conditions. The assist operation will automatically engage 4WD when required and switch to 2WD when working in tight turns to facilitate maneuvering.

The versatility makes these machines appealing across different sectors.

# **All weather protection**





Operators enjoy an unobstructed view no matter what operation is being performed. Generous headroom and logical control layout gives the operator a big-cab feel. A ventilation system which offers air-conditioning, heater and three-speed fan helps reduce operator fatigue, leading to increased overall productivity.



#### Comfort of the highest order

The fully integrated cab offers a wide range of innovative features which creates a premium workspace.

The generous interior is enhanced by fullglass door panels for complete all-round visibility and the noise level remains at a minimum thanks to thick padded floor matting and silent-bloc mounts.

Upholstered interior panels and headliner adds to the quality feel of these machines.



#### Having to work late. No problem.

Roof mounted road lights and work light allow work to continue into the evening. Rear view mirrors, flashing beacon and fully compliant road lighting package ensures safe transport from the site. The front window is kept clear by a widearc parallel screen wiper with washer.

### **#Serviceability**

# Collect with confidence and ease



#### Large capacity collector

A 700-litre capacity grass collector allows large areas to be worked before emptying. Lever operated, the high tip collector tank can be unloaded quickly and efficiently.



#### **Chopped material transfer**

The powerful suction fan collects and dispatches chopped material quickly and effectively whatever the conditions.

The clever design of the collector utilising a deflector inside, ensures the collector is filled completely every time to maximise the operation.



#### Safety comes first

Safety brackets are permanently fixed to the machine. When the collector is fully raised, simply unlatch the brackets on both sides before carrying out any work in the engine compartment.

# Access for serviceability - Unbeatable



#### One-piece engine bonnet.

No restriction to the engine compartment, even when fitted with a collector or cab.

All checks and maintenance can be carried out easily and safely.



#### 90° mower deck tilt.

The mower deck can be tilted for any maintenance requirements. Quick, effortless positioning allows complete access to the underside.



#### Genuine parts, genuine confidence

When buying genuine Kubota parts, you can be assured of the highest standards of quality and engineering excellence to deliver unrivalled reliability, efficiency and productivity, supported by a full 18-month warranty \*when fitted by a Kubota dealer - for complete peace of mind.





#### **Kubota Care:**

- Protects you against, Inflation, VAT, Parts, Labour Prices:
- Provides you with a fully extended warranty of up to 5 years;
- In the case of a claim your dealer is your point of contact. That means no hassle with third-party providers:
- Increase your machine's resale value. Kubota Care is transferable to the new owner.

10 F Series ———

# The uniqueness of the out-front mower



## Mowing accessibility leads to economical benefits

The front mounted mower deck provides a list of benefits for you.

As well as having the best forward visibility when working, the economic benefit can be enormous as they get into areas that conventional mowers can not reach and can save up to 20% on follow-up work.

The ultimate result is less time spent on each job and maximising the productively of your machine.

#### **Long-Term Value**

• Cost-Effective in the Long Run: Though they may have a higher upfront cost than traditional mowers, the durability, performance, and timesaving features of F Series mowers make them a great long-term investment for those who want to get the most value out of their equipment.

#### Buy with confidence

Kubota is a key player with a long and successful history within the ground care industry.

When you buy a Kubota, you get;

- A strong and established Kubota dealer network.
- The assurance of a reliable and quality product.
- A product that is going to retain good secondhand value.
- A true manufacturers warranty guarantee (Not third party).

### **#Technical data**

Model		F-251E	F-251	F-391
ENGINE		. 2012		
Model		Kubota D1105	Kubota D1105	Kubota V1505-CR-TE5
Cylinders	n°	3	3	4
Displacement	CC	1123	1123	1498
<u> </u>	lp/kW	24.5 / 18.5	24.5 / 18.5	37.4 / 27.5
Aspiration / Emission control		Natural / Not required	Natural / Not required	Natural / DPF stage V
	hp/kW	22 / 15.8	25 / 18.2	25 / 18.2
Engine rated speed	rpm	3100 - 3200	3100 - 3200	2720
Fuel tank capacity	- 1	61	61	61
TRANSMISSION				
Transmission type		Hydrostatic (HST)		
Speed range		2		
Max. Forward speed		Lo: 9 Km/h Hi: 20 Km/h		
Max. Reverse speed		Lo: 4.8 Km/h Hi: 11 Km/h		
Forward / Reverse control			Single pedal operation	
Drive wheel type		2WD	4WD	4WD
Mechanical Differential lock		No	Standard	Standard
PTO drive engagement	drive engagement Lever		Lever	
Steering		Hydraulic power steering		
Brakes		Wet disc		
OPERATOR STATION				
ROPS		Foldable	Foldable	Foldable
Cab		Not available	Not available	Optional
Headlights		LED	LED	LED
DIMENSIONS AND WEIGHTS				
Front tyres		23 x 10.50-12 ((4PR) Turf	24 x 12-12 (4PR) Turf	24 x 12-12 (4PR) Turf
Rear tyres		16 x 6.58 (4PR) Turf	18 x 9.5-8 (6PR),Turf	18 x 9.5-8 (6PR),Turf
Wheelbase	mm	1300	1300	1350
Overall length (without mower deck)	mm	2505	2450	2530
Overall height (With ROPS upright)	mm	1997	1985	1985
Overall height (with cab)	mm	-	-	2030
Overall width (without mower deck)	mm	1240 ROPS	1370 ROPS	1370 ROPS
Overall width (without mower deck)	mm	-	-	1725 Cab (Mirrors out)
Total weight (Without mower deck)	kg	727	741	853 ROPS / 1071 Cab









Rotary mower deck cutting system					
Model		RCK60-F251EU	RCK60R-F251EU	RCK72-F391EU	RCK72R-F391EU
Deck cutting width	mm (Inch)	1520 (60)	1520 (60)	1829 (72)	1829 (72)
Discharge direction		Side	Rear	Side	Rear
Deck raise / lower		Hydraulic lever control	Hydraulic lever control	Hydraulic lever control	Hydraulic lever control
No. of blades		3	3	3	3
Cutting height range	mm	25 – 129	25 – 129	25 – 129	25 – 129
Mulching kit		Optional	Optional	Optional	Optional

Flail mower deck cutting system				
Model		TEG Special 1400	TEG Special 1600	
Deck width	mm (Inch)	1400 (56")	1600 (64")	
Deck raise / lower		Hydraulic lever control	Hydraulic lever control	
No. of blades		88	100	
Cutting height range	mm	25 to 88	25 to 88	





Collector (optional)		F-251	F-391
Model		GCD901U	GCD901F
Collector capacity	Litres	700	700
Dumping height	mm	2155	2155
Collector fan		Belt drive	Hydraulic drive
Fan speed	rpm	2700	2600
Weight (With fan)	kg	340	365





14 F Series ——— 15

#### Kubota (U.K.) Limited

Dormer Road Thame, Oxfordshire, OX9 3UN

#### http://www.kubota.co.uk

This publication may not be reproduced in whole or in part in any form without the prior written consent of KUBOTA. It corresponds to the status at the time of going to press. The manufacturer reserves the right to change technical specifications without notice. Some of the parts shown in the publication are optional and are not part of the standard equipment. Information on warranty and safety as well as further product information can be obtained from the responsible KUBOTA authorized dealer.

